


MAGPOWR Ultrasonic Sensor

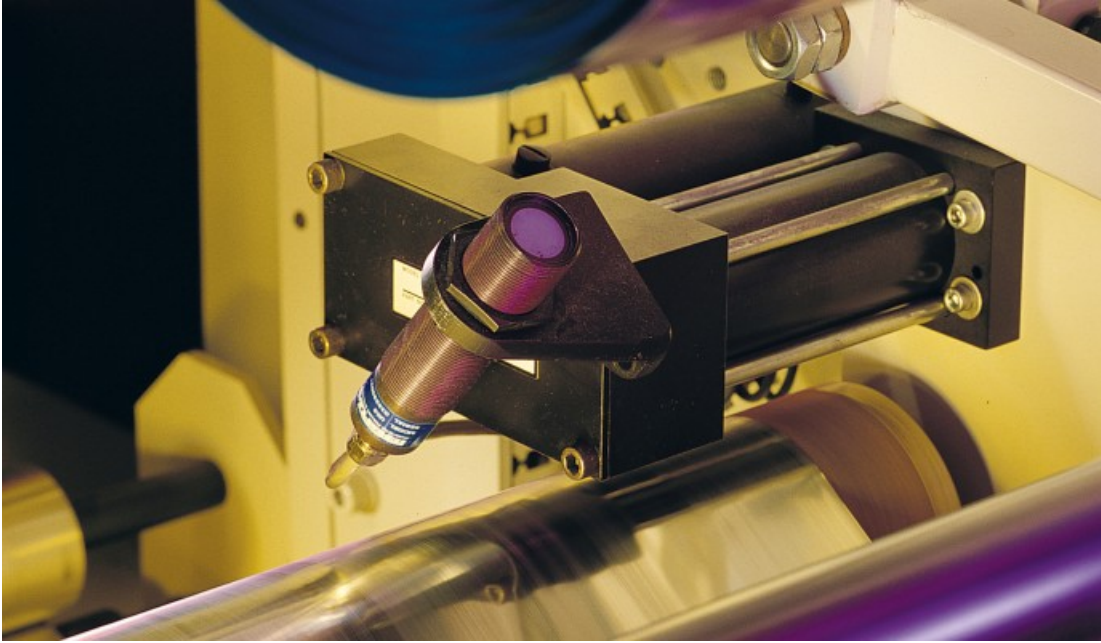


Scrap is essentially waste, and waste represents reduced profits. An effective way to reduce scrap and therefore maximize profits is by increasing the accuracy and control of the web. MAGPOWR's US-2 Ultrasonic Sensor used with VERSATEC control measures the diameter of the roll and allows your core and full roll alarms to be adjusted to give your operator proper notification before reaching the end of the roll. This fully automated ultrasonic tension control system allows you to reduce scrap by utilizing the entire roll on your web.

Specifications:

Resolution: 0.025% of span, or .007 inch (0.18 mm) whichever is larger

Rewind Taper: Adjustable from 0 to 100%

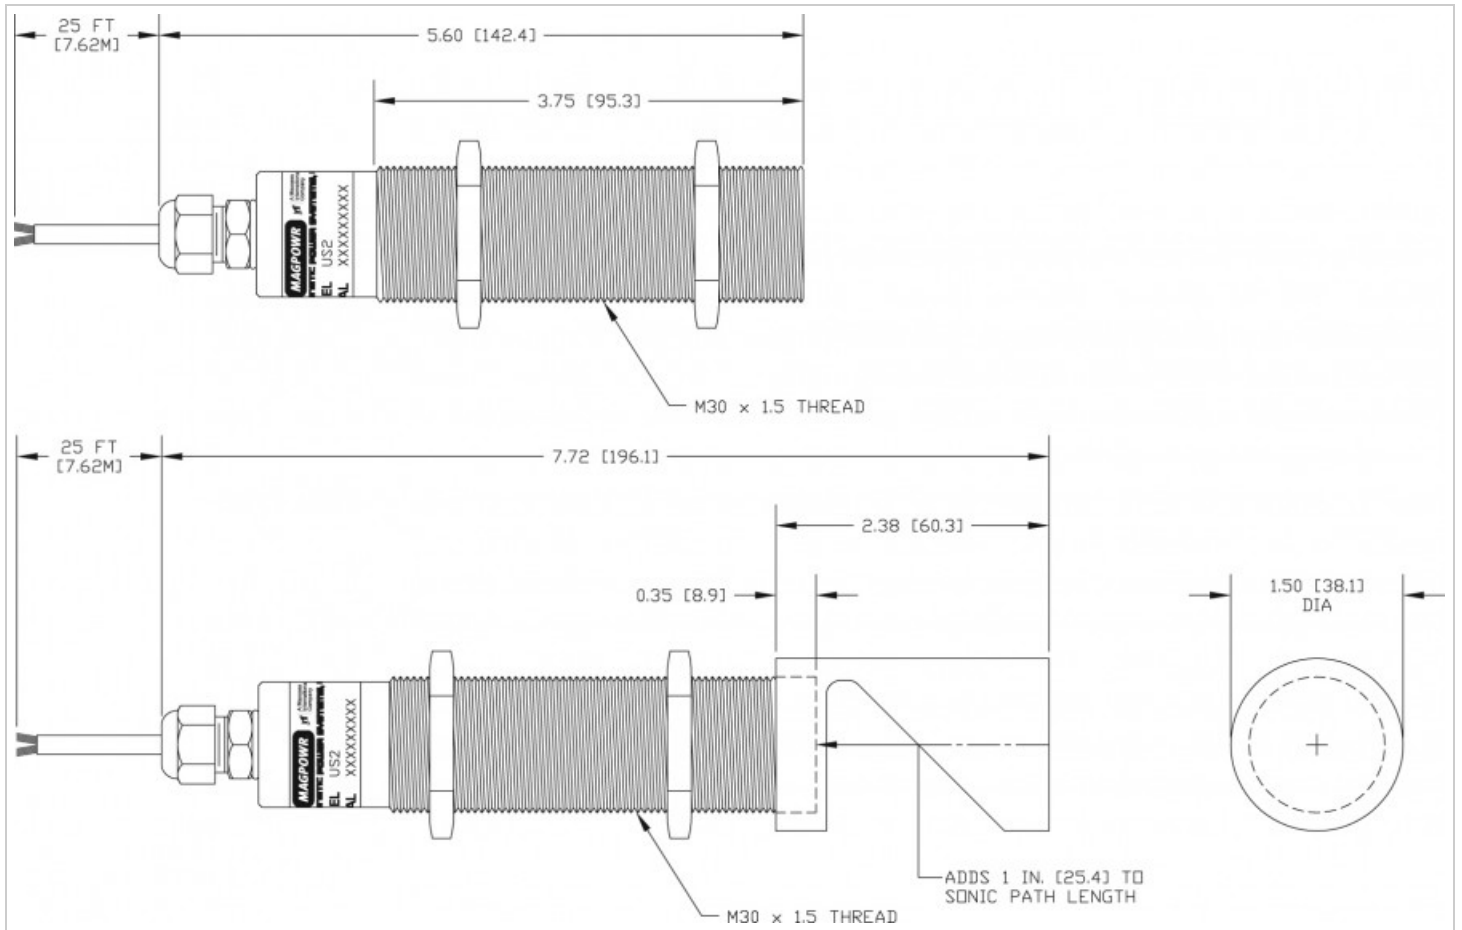

North America

MAGPOWR: +1.800.624.7697
 Fife: +1.800.639.3433
 Tidland: +1.800.426.1000
[Contact](#)

South America

Tel +55.11.3959.0990
 Fax +55.11.3856.0990
[Contact](#)

Europe

Tel +49.6195.7002.0
 Fax +49.6195.7002.933
[Contact](#)

India

Tel +91.22.27602633
 Fax +91.22.27602634
[Contact](#)

China

Tel +86.756.881.9398
 Fax +86.756.881.9393
[Contact](#)

Japan

Tel +81.43.421.1622
 Fax +81.43.421.2895
[Contact](#)

Korea, Taiwan and SE Asia

Tel +65.9620.3883
 Fax +65.6235.4818
[Contact](#)

Source URL: <http://magpowr.maxcessintl.com/tension-control/magpowr-ultrasonic-sensor>